



TMS 374 family programming start-up

1. Connect MCU RESET pin with programmer's reset line
2. (labor connector).
Connect programmer to power supply (green LED should
3. blink three times)
Start TMS374.exe
4. Read or write 256 Bytes of EEprom memory.

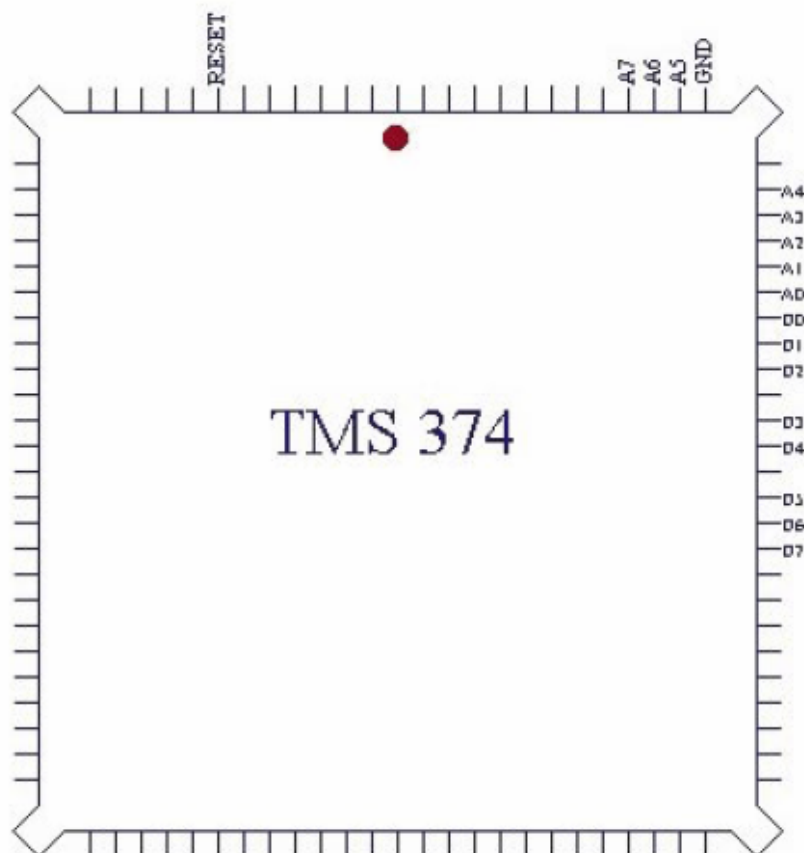


- Use standard RS232C connection cable
- Use 12V DC power supply (+ on pin)
- Baud rate 115200 8N1
- The programmer works without ECU power supply

Emulation plug pinout

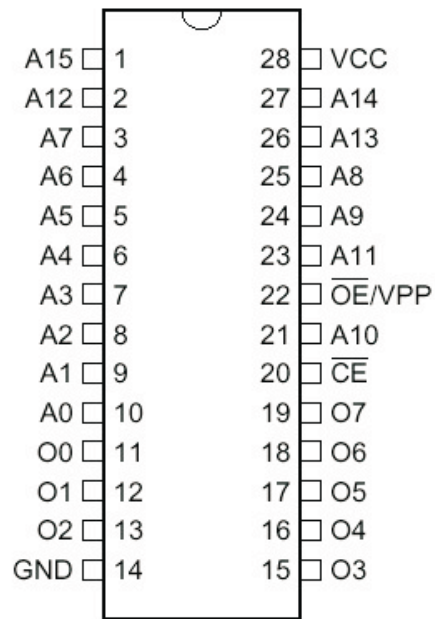

Contents of the programmer kit

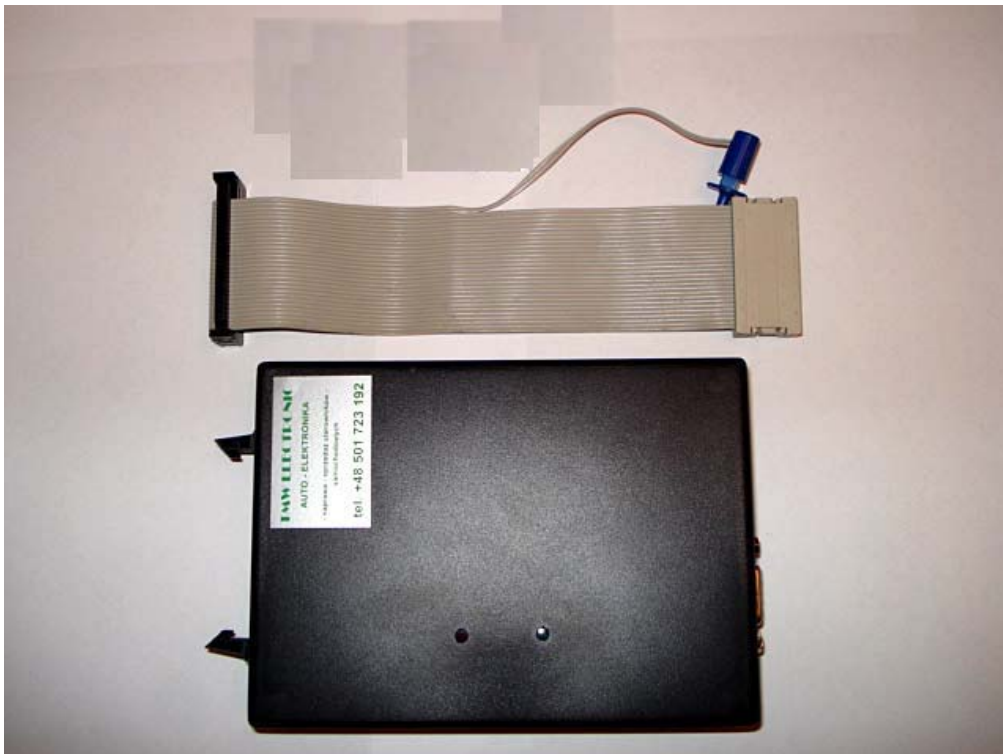

TMS374 Programmer Kit

- TMS374 programmer
- Connection cable with emulation plug